
Replace Filter:

Attention


Attention:If the gir power slower, please replace the filter. We suggest to replace the filter every 3 months.

How to replace the Filter:

1 As shown in the figure, unplug the power plug, then open the shell and unplug the connection plug of the induction window




2 Open the filter cover and remove the filter.



3 Replace with new filters.

4 Install the filter and close the filter cover plate




Maintenance:


1, Please cut off the power and clean the shell with natural detergent when it is dirty. The acid and alkalescent bathroom detergent and BEN, lacquer thinner, gbrasive etc are forbidden. Besides, do not use nylon brush such friction tool clean it avoiding be scratched;
2, When cleaning the shell prevent the water droplets into the machine, so as to avoid electric shock or short circuit;
3, It's better to cut off the power when off duty, to extend the service life;
4, If the power software cord is damaged, it should be replaced with specialized software or buy components from factories or dedicated maintenance.
5,If the machine breaks down, cut off the power quickly and stop work., please commission the professional to repair it.;
6,If long time no use of this machine, please cut off the power, and store it in clean and dry indoors with sealed after cleaning.

Terms of guarantee:

1, The product warranty period is one year.
2,The service within warranty period for products, which came into effect from the date of buying the machine.
3,Within one year after purchasing, consumers find the machine failure caused by the product itself reason, then they can go to the purchasing place to maintenance and replace the machine for free with original invoices and completed and the quality assurance card stamped by dealers.
4, The following are not in the scope of free maintenance:
- ◆ Improper use and the fault caused by demolition, alteration and repgir by technical persons without our company authorization.
- ◆ Fires, earthquakes, thunder and other natural disasters cause faults, and abnormal voltage causes the faults.
- ◆ The faults caused by non matching power.
- ◆ The faults caused by long time operation in bad working condition.
- ◆ Not quality assurance card or the cards is flit not explicitly or correctly.

5, Over warranty period or it is not free mgintained products, while our company remains committed to serving.





Slim High Speed Hand Dryer

Hand Dryer

Operation Instruction

Dear customer:
Thanks for your purchase of my company's products. Please read this instruction before installation and keep it for installation and usage or any other further reference.

Features:

1, When the hand dryer is powered on ,plegse wait 1 seconds. The machine can adjust the sensor length automatically.

2, It has high speed motor to dry the hands with 10 seconds.

3, It only needs expansion pipe and screw hook when install–ation, then hang the machine, cut off the power when maintenance. It is suitable for all departments in hospitals, school, food and pharmaceutical manufgcturers, girports, office buildings, hotels, government agencies and research institutions and other places.

4, This series product is all with over current protection, which effectively eliminates accidents.

Technical parameters:

Rated Voltage	AC220-240V ☐ AC110-120V ☐	Waterproof Grade	IPX4
Rated Frequency	50/60HZ	Brush Motor Wind Speed	110m/s ☐
Brush Motor Rated Power	400W-1200W ☐	Brushless Motor Wind Speed	120m/s ☐
Brushless Motor Rated Power	350W-1150W ☐	25 ℃ Automatic Heating Power	800W
Temperature at the air outlet	45℃	Drying Time	7-10s
Installation	Wall Mounting	Overall size	240x300x99.9mm

Note before installation:


⚠Warning

1,Do not fix it in the place with water or water vapor in surface, not install in the bathroom which with heavy moisture, in order to avoid electric shock.
2,You must commission professional electrician to install power lines, or else it has electric shock hazard.
3,You must cut off power before operation and ensure the protection no power.
4,Requests to install leakage circuit breakers or protection against fire hazards
5,Do not decompose, repair or any alteration of this machine without authorization, otherwise there is a risk of electric shock, fire and other accidents;

⚠Attention

1,To ensure that no other things in the outlet around 400mm. Meanwhile, do not install it above the stainless steel or artificial marble such shining surface location, otherwise prone to misoperation.
2,The body should be firmly fixed to the smooth wall to avoid injuries caused by the decline of product or product damage
3,Do not install the products in such place with corrosive or flammable gases or objects, it may cause fire or product failure and malfunction
4,Do not install the products in such environment with multi dust or in high temperature, it may cause product damage.

Components Name:

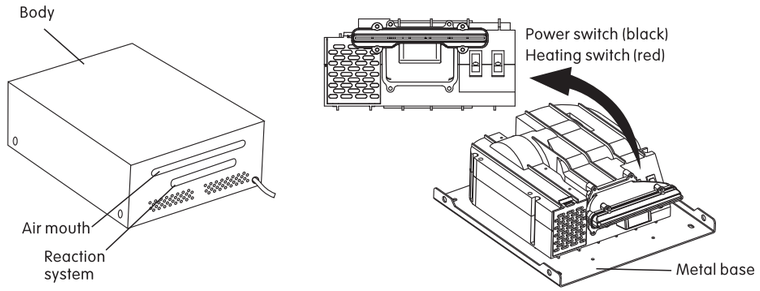

Method of Installation:

